

MIG-MAG GMAW-FCAW

TRADITIONAL
110 > 450 A



MIG-MAG GMAW-FCAW

TRADITIONAL
110 > 450 A

SMARTMIG	34
MONOGYS / TRIMIG	36
PROMIG	38
MAGYS	40

INVERTER
85 > 500 A

EASYMIG	42
MULTIWELD	44
MULTIPEARL	46
KRONOS	48
NEOMIG-i	52
NEOPULSE	54
EXAGON	64
NOMADFEED/EXATIG	66



AUTOMATION	60
ACCESSORIES & CONSUMABLES	68



SMARTMIG

MIG/MAG TRADITIONAL

230 V • 1~

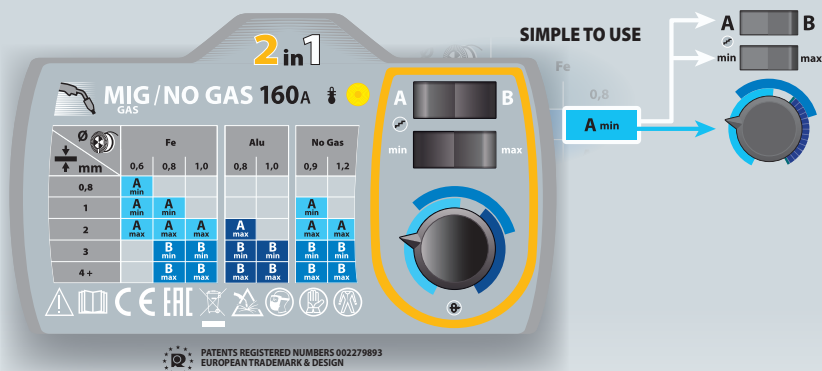

Youtube



230 V • 1~

400 V • 3~

SMARTMIG 110

110A Ø 100

NO GAS



2 m + 1.65 m, 6 mm²
033993

SMARTMIG 142

140A Ø 100/200

GAS

NO GAS



2 m + 1.65 m, 10 mm²
033153

SMARTMIG 152

140A Ø 100/200

GAS

NO GAS



2 m + 1.65 m, 10 mm²
032859
 031937

SMARTMIG 162

160A Ø 100/200

GAS

NO GAS

160A on 13A fuse



2 m + 1.65 m, 16 mm²
033160
 034297

SMARTMIG 182

180A Ø 200/300

GAS

NO GAS



033184

SMARTMIG 183

200A Ø 200/300

GAS

NO GAS



033412

SMARTMIG

MIG/MAG • TRADITIONAL

35

GYE

OPTIONS

NO GAS



Kit soudage NO GAZ
- No Gas Welding Kit
- Schweißset Fülldraht

Ø 0.9 1.0 / 1.2

041240



NO GAS

Fil fourré / Flux cored wire / Fülldrahtelektrode

INFO

Flux /
Flow /
Pulverfüllung

Enveloppe métallique /
Metallic wrap /
Metallischer Außenmantel

A

Inverser les polarités / Reverse polarities / Polarität wechseln

Changer le tube contact / Change the contact tip

OU / OR / ODER

Kontaktrohr austauschen

C Changer le galet / Change the roller / DV-Rolle austauschen

Supprimer la buse / Remove the nozzle / Gasdüse abziehen

OU / OR / ODER


Utiliser une buse spéciale NO GAS (isolée) / Use a special nozzle

NO GAS (isolated) / Spezielle Gasdüse für "NO GAS" (isoliert) verwenden

MIG/MAG

TRADITIONAL

SYNERGIC

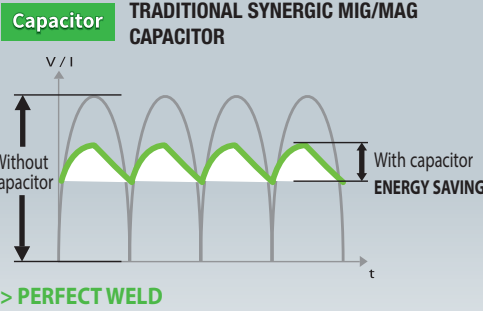

SYNERGIC • EASY TO USE

Réglage automatique de la vitesse
- Auto adaptative wire speed
- Automatische Einstellung der Drahtgeschwindigkeit



230 V • 1~

400 V • 3~

MONOGYS 200-4 CS

200 A

  Ø 200/300

GAS

Capacitor



3 m + 2 m, 25 mm²

065949

MONOGYS 250-4 CS

250 A

  Ø 200/300

GAS

Capacitor



3 m + 2.5 m, 25 mm²

020368

MONOGYS 320-4 CS

320 A

   Ø 200/300

GAS

NO GAS

Capacitor



4 m + 4 m, 35 mm²

065079

Delivered in  x3

no accessories :
063020

TRIMIG 200-4S

200 A

 Ø 200/300

GAS



3 m + 2 m, 25 mm²

033818

TRIMIG 250-4S DV

250 A

 Ø 200/300

GAS



3 m + 4 m, 25 mm²

033825

TRIMIG 300-4S

300 A

  Ø 200/300

GAS

NO GAS



4 m + 4 m, 35 mm²

021624

Delivered in  x3

no accessories :
033832

DESIGN GYS FRANCE	 EN60974-1				 A		 min + max		EN60974-1 (40 °C)									Capacitor Inside	Equipement d'origine Original equipment Originalausstattung Equipamento de fabrica					 Protected & compatible power generator (+/-15%)
		50/60 Hz			Norm	Intensive	A	Reg	IA (60%)	X% (I2 max)	Uo (V)	Electronic Control	m/min	200 mm 5 kg	300 mm 15 kg	GAS	NO GAS		 mm	TYPE		cm	kg	
MADE IN GYS CHINA	MONOGYS 200-4 CS	230 V 1~	—	2 m	16	25	25 + 200	6	110	200 A @ 15%	17+34		15	■	■	0.6+1.0	—	■	0.8/1.0	A 041189	1.0 mm	76 × 78 × 47	70	7.5 kW
	MONOGYS 250-4 CS	240 V 1~	—	2 m	25	40	40 + 250	8	155	250 A @ 15%	17+38		20	■	■	0.8+1.2	—	■	0.8/1.0	B 042360	1.0 mm	76 × 78 × 47	83.5	9 kW
 MADE IN FRANCE	MONOGYS 320-4 CS	240 V 1~	—	3 m	32	50	30 + 320	12	210	320 A @ 25%	17+43		20	■	■	0.8+1.2	0.9+1.2	■	1.0/1.2	B 046849	1.2 mm	95 × 93 × 50	105	13 kW
MADE IN FRANCE & CHINA	TRIMIG 200-4S	400 V 3~	■	3 m	10	10	30 + 200	7	140	200 A @ 30%	17+34.5		15	■	■	0.6+1.0	—	—	0.8/1.0	B 042360	1.0 mm	76 × 78 × 47	70	7.5 kW
MADE IN GYS CHINA	TRIMIG 250-4S DV	400 V 3~ / 230 V 3~	■	5 m	10 / 16	16 / 25	35 + 250	10	180	250A @ 30%	17+37		20	■	■	0.6+1.2	—	—	0.8/1.0	B 042360	1.0 mm	95 × 93 × 50	91.5	9 kW
 MADE IN FRANCE	TRIMIG 300-4S	400 V 3~	■	5 m	16	20	35 + 300	12	240	300 A @ 35%	17+37		20	■	■	0.6+1.2	0.9+1.2	—	1.0/1.2	B 046849	1.2 mm	95 × 93 × 50	100.5	12 kW

X%

MAGYS 400 350 A - 50%
MAGYS 500 450 A - 50%
FULL SYNERGIC MIG OVER 1 000 PARAMETERS

EN 1090

+/-

ADJUSTABLE :
ELECTRONIC
CONTROL

• CREEP SPEED
• BURN BACK
• POST GAS

DYNAMIC ARC
CONTROL
TECHNOLOGY

÷ ?
↑ ↓

MATERIAL
THICKNESS
TEST

24 m/min
max

4 DRIVE ROLLERS Ø 37 mm
MOTOR 70W
HIGH QUALITY
FOR HIGH PRECISION
Rollers Type C
MAGYS 400-4 , WS-4R, WS-4L

XL
↑ ↓

HIGH STABILITY

360°

SHOCK RESISTANT

EASY CLEANING

MAGYS

MIG/MAG

TRADITIONAL

SYNERGIC

Youtube

Max 10 m³
(50 L)

70/95 mm²
Ø 13 mm

COMPACT

MAGYS 400-4

350 A

Ø 200/300

AIR

no accessories :
032170

WF

WIRE FEEDER COMPATIBILITY

WS-4R

AIR

034723

WS-4L

LIQUID

033573

OPTIONS WS-4R/4L

Skate
040977

Wirefeeder support
details p. 71
036277

W5S-4L

AIR

LIQUID

032835

SMALL SIZE

Ø 200 -

COMPLETE PACKS

MAGYS 400-4						
pack MAGYS 400-4 1 032279	—	—	Ø1/1.2 (original equipment)	4m, 50 mm² 047853	—	350 A, 4 m, air 040946
pack MAGYS 400-4 2 032286	—	—	Ø1/1.2 (original equipment)	Alu, Ø1/1.2 (x2) 042162	4m, 50 mm² 047853	—
						350 A, 3 m, air 040731

MAGYS 500 WS									
pack MAGYS 500 WS 1 032330	WS-4L 033573	—	Ø1/1.2 (original equipment)	—	4m, 70 mm² 043831	10m, liquid, ø 70 mm² 033658	500 A, 4 m, liquid 041004	—	
pack MAGYS 500 WS 4 036475	WS-4L 033573	—	Ø1/1.2 (original equipment)	—	4m, 70 mm² 043831	5m, liquid, ø 70 mm² 033641	500 A, 4 m, liquid 041004	—	
pack MAGYS 500 WS 2 032347	WS-4L 033573	—	Ø1/1.2 (original equipment)	Alu, Ø1/1.2 (x2) 042162	4m, 70 mm² 043831	10m, liquid, ø 70 mm² 033658	—	500 A, 3 m, liquid 046160	
pack MAGYS 500 WS 3 032354	—	W5S-4L 032835	Ø0.8/1 (original equipment)	—	4m, 70 mm² 043831	10m, liquid, ø 70 mm² 033658	500 A, 4 m, liquid 041004	—	

Cooling liquid (not included)

5L
062511

10L
052246

OPTIONS

Câble d'inversion de polarité
- Polarity reversal cable
- Umpolungskabel

1.3 m 95 mm² 033689
5 m 95 mm² 032439
10 m 95 mm² 032446

Faisceaux de liaison - Connection cable
- Zwischenschlauchpakete

AIR COOLED
5 m 50 mm² 034822
5 m 70 mm² 034839
10 m 50 mm² 034853
10 m 70 mm² 034860
10 m 95 mm² 045941
LIQUID COOLED
1.6 m 70 mm² 033696
5 m 70 mm² 033641
10 m 70 mm² 033658
10 m 95 mm² 034877
15 m 95 mm² 034884

GOUGING

Gougeage - Gouging - Fugenhobeln

Ø8 mm max
041516

Câble pour pince de gougeage
- Cable for gouging torch
- Anschlusskabel für Fugenhobel-Brenner

70 mm² - 5 m
040670

Électrodes de gougeage
- Gouging - Electrodes
- Fugenhobelelektrode
- Electrodo de carbono

Ø 5 mm (x50) 069756
Ø 6.4 mm (x50) 086081
Ø 8 mm (x50) 086098

Screen protection included with Magys
046191

Cable support (x4)
046535

CE NORM. EN60974-1	MADE IN FRANCE	50/60 Hz	— —				EN60974-1 (40°C)	U ₀ (V)	Electronic Control	m/min						EQUIPEMENT D'ORIGINE Original equipment Originalausstattung Equipamiento de fabrica	TYPE			Cooling system			cm	kg			Protected & compatible generator (+/-15%)	
			Norm	Intensive			I(A) (60%)	X% (I2 max)	100%		200 mm 5 kg	300 mm 15 kg	GAS	NO GAS														
MAGYS 400-4		400V 3~	20	25	40 → 350	20	320	350 A @ 50%	260 A	17-43		24	■	■	0.6 + 1.6	0.9 + 1.6	1.0 / 1.2 mm	C 042117	■	—	Air	46 × 93 × 110	134	20 kW				
MAGYS 500 WS		400V 3~	25	32	45 → 450	30	410	450 A @ 50%	320 A	18-51	—	—	—	—	—	—	—	—	+ WS-4L or W5S-4L	Liquid	48 × 93 × 110	157	30 kW					
WS-4R		—	—	—	—	—	—	—	—		24	■	■	0.6 + 1.6	0.9 + 2.4	1.0 / 1.2 mm	C 042117	—	■	Air	68 × 56 × 35.5	22	—					
WS-4L		—	—	—	—	—	—	—	—		24	■	■	0.6 + 1.6	0.9 + 1.6	0.8 / 1.0 mm	B 042360	—	■	Air + Liquid	32 × 49 × 23	12	—					
W5S-4L		—	—	—	—	—	—	—	—		20	■	—	0.6 + 1.6	0.9 + 1.6	0.8 / 1.0 mm	B 042360	—	■	Air + Liquid	32 × 49 × 23	12	—					

MAGYS

MIG/MAG • TRADITIONAL

41

GYS

40



EASYMIG

MIG/MAG INVERTER

230 V • 1~

3
in 1

GAS
NO GAS
MMA



Youtube


EASY TO USE

Example / Exemple EASYMIG 160



EASYMIG 85

85 A $\varnothing 100$
NO GAS



EASYMIG 110

100 A $\varnothing 100$
GAS NO GAS MMA



EASYMIG 130

120 A $\varnothing 100$
GAS NO GAS MMA



EASYMIG 140

140 A $\varnothing 100$
GAS NO GAS MMA



EASYMIG 150

140 A $\varnothing 100/200$
GAS NO GAS MMA




EASYMIG 160

160 A $\varnothing 100/200$
GAS NO GAS MMA




EASYMIG 160 XL

160 A $\varnothing 200/300$
GAS NO GAS MMA



EASYMIG 180-4 XL

180 A $\varnothing 200/300$
GAS NO GAS MMA



EASYMIG

MIG/MAG • INVERTER

43

42

OPTIONS

KIT SOUDAGE NO GAZ Ø 0.9
- No Gas Welding Kit Ø 0.9
- Schweißset Fülldraht

NO GAS

041240 150 A type A

more p.71



 EN60974-1	MADE IN GYS CHINA				I ₂ MMA	I ₂ MIG	MIG		MMA										Ø mm	Equipement d'origine Original equipment Originalausstattung Equipamiento de fabrica				
		50 / 60 Hz	A	EURO			A	A	IA (60%)	X% (I2 max)			IA (60%)	X% (I2 max)	100 mm 1 kg	200 mm 5 kg	300 mm 15 kg			GAS	NO GAS	MMA		
		EASYMIG 85	230V 1~	16	—	—	30 ÷ 85	50	85 A @ 20%	—	—	30		■	—	—	—	0.6 ÷ 0.9	—	0.6 / (no gas) / 0.9 (no gas)	D-068926	0.6	38 × 24 × 28	7.9
EASYMIG 110	230V 1~	16	—	20 ÷ 80	30 ÷ 100	60	100 A @ 30%	50	80 A @ 30%	62		■	—	—	0.6 ÷ 0.8	0.6 ÷ 0.9	1.6 ÷ 2.5	0.8 (gas) / 0.9 (no gas)	D-039476	0.8/0.9	41 × 42 × 19	9.5		
EASYMIG 130	230V 1~	16	—	20 ÷ 100	30 ÷ 120	70	120 A @ 20%	60	100 A @ 20%	62		■	—	—	0.6 ÷ 0.8	0.6 ÷ 0.9	1.6 ÷ 3.2	0.8 (gas) / 0.9 (no gas)	D-039476	0.8/0.9	43 × 42 × 19	10.5		
EASYMIG 140	230V 1~	16	■	20 ÷ 120	30 ÷ 140	80	140 A @ 15%	70	120 A @ 15%	62		■	—	—	0.6 ÷ 0.8	0.6 ÷ 0.9	1.6 ÷ 3.2	0.8 (gas) / 0.9 (no gas)	D-039476	0.8/0.9	43 × 42 × 19	11.3		
EASYMIG 150	230V 1~	16	■	20 ÷ 120	30 ÷ 140	80	140 A @ 15%	70	120 A @ 15%	62		■	■	—	0.6 ÷ 0.8	0.6 ÷ 0.9	1.6 ÷ 3.2	0.8 (gas) / 0.9 (no gas)	A-046856	0.8/0.9	52 × 36 × 25	13		
EASYMIG 160	230V 1~	16	■	20 ÷ 140	30 ÷ 160	95	160 A @ 20%	90	140 A @ 20%	59		■	■	—	0.6 ÷ 0.8	0.6 ÷ 0.9	1.6 ÷ 3.2	0.8 (gas) / 0.9 (no gas)	A-046856	0.8/0.9	50 × 36 × 25	14.3		
EASYMIG 160 XL	230V 1~	16	■	20 ÷ 140	30 ÷ 160	95	160 A @ 20%	90	140 A @ 20%	59		—	■	■	0.6 ÷ 0.8	0.6 ÷ 0.9	1.6 ÷ 3.2	0.8 (gas) / 0.9 (no gas)	A-046856	0.8/0.9	55 × 44 × 25	15.7		
EASYMIG 180-4 XL	230V 1~	16	■	20 ÷ 150	30 ÷ 180	110	180 A @ 20%	100	150 A @ 20%	59		—	■	■	0.6 ÷ 0.8	0.6 ÷ 0.9	1.6 ÷ 3.2	0.8 (gas) / 0.9 (no gas)	A-046856	0.8/0.9	55 × 44 × 25	15.7		



MULTEPEARL

MIG/MAG INVERTER SYNERGIC

4
in 1

GAS

NO GAS

MMA

TIG



Youtube

1 MIG / MANUAL


Enter your parameters



Adjust
Spot
& Delay

2 MIG / SYNERGIC

Easy to use




Select :

1. material
 2. Ø wire
 3. position
 4. thickness : 0.5 → 6 mm
- Adjust arc length

Fe	CrNi
AlMg5	CuSi3
AlSi5	AlSi12
CuAl18	F.C.

3 MMA



HotStart
ArcForce
Electrodes : Ø 1.6 → 5 mm

4 TIG lift



Post Gas
Downslope
Thickness : 0.5 → 8 mm



POWER FACTOR CORRECTION
PFC
EN 61000-3-12
FV
FLEXIBLE VOLTAGE

POWER FACTOR CORRECTION
PFC
EN 61000-3-12
FV
FLEXIBLE VOLTAGE


POWER FACTOR CORRECTION
PFC
EN 61000-3-12
FV
FLEXIBLE VOLTAGE

Max 4 m³
(20L)

10/25 mm²
Ø 9 mm

MULTEPEARL 210-2


200 A						
P400	PFC	FV	SR	HS	AF	Anti Sticking
GAS	NO GAS	MMA	TIG			



065093

MULTEPEARL 210-4 XL


200 A						
P400	PFC	FV	SR	HS	AF	Anti Sticking
GAS	NO GAS	MMA	TIG			



065109

MULTEPEARL 211-4

200 A						
P400	PFC	FV	SR	HS	AF	Anti Sticking
GAS	NO GAS	MMA	TIG			




065116

PFC POWER FACTOR CORRECTION
185 V ← 265 V




FV FLEXIBLE VOLTAGE
85 V ← 265 V



SR SECONDARY REGULATION



Anti Sticking



OPTIONS

TIG torch kit SR17 V (valve)
4 m
10/25 mm²
044425

TIG torch kit SR17 DB
4 m
046108

KIT SOUDAGE NO GAZ Ø 0.9
- No Gas Welding Kit Ø 0.9
- Schweißset Fülldraht

NO GAS

more
p.71

072336

- Base (x1)
- Ceramic nozzle (x3)
- M6 - Ø 0.9/1.0 (x3)
- Type A Ø 0.9-1.0 / 1.2 (x1)

EURO

46

GYS

47

MULTEPEARL

MIG/MAG • INVERTER

 MADE IN FRANCE			 I ₂ MMA	 I ₂ TIG	 min → max	 EN60974-1 (40°C)	 U _o (V)	 Electronic Control	MIG						 Ø mm	 Ø mm	Equipement d'origine Original equipment Originalausstattung Equipamiento de fabrica					
									 max													
		50 / 60 Hz	A	A	A	IA (60%)	X% (I2 max)	Uo (V)		m/min	100 mm 1 kg	200 mm 5 kg	300 mm 15 kg	GAS	NO GAS	MMA	TYPE		cm	kg		
Multi PEARL 210-2	110V 1~	32	10 → 130	10 → 160	20 → 150	100	150 A @ 22%	76		15	■	■	—	0.6 + 1.0	0.9 + 1.2	1.6 → 3.2	A1189	0.8/1.0	25 x 45 x 35	16	7.5 kW	
	230V 1~	16	10 → 200	10 → 200	20 → 200	130	200 A @ 20%	75								1.6 → 5.0						
Multi PEARL 210-4 XL	110V 1~	32	10 → 130	10 → 160	20 → 150	100	150 A @ 22%	76		15	—	■	■	0.6 + 1.0	0.9 + 1.2	1.6 → 3.2	B	0.8/1.0	27.5 x 55 x 44	20	7.5 kW	
	230V 1~	16	10 → 200	10 → 200	20 → 200	130	200 A @ 20%	75								1.6 → 5.0	B					
Multi PEARL 211-4	110V 1~	32	10 → 130	10 → 160	20 → 150	100	150 A @ 22%	76		15	—	■	■	0.6 + 1.0	0.9 + 1.2	1.6 → 3.2	B	0.8/1.0	41 x 73 x 77	27	7.5 kW	
	230V 1~	16	10 → 200	10 → 200	20 → 200	130	200 A @ 20%	75								1.6 → 5.0	B					



KRONOS

MIG/MAG INVERTER DIGITAL

NEW



Easy mode

Expert mode

10 languages

- French
- English
- German
- Italian
- Spanish
- Czech
- Dutch
- Russian
- Chinese
- Japanese

MIG

MANUAL	STANDARD SYNERGIC
SPOT	SPOT DELAY

TIG

STANDARD	PULSE
SPOT	SPOT PULSE

MMA

STANDARD	PULSE
----------	-------

MANUAL


QUICK LOAD



CONNECTIVITY

PORTABILITY

Share configuration & jobs



SOFTWARE UPDATE

Kronos evolutions



4 in 1	GAS	NO GAS
	TIG	MMA

50 W

Speed control
with tachymeter

20 m/min max




230 V • 1~

KRONOS 250M

NEW

230 V • 1~

250 A ⚡ ⌀ 200/300




400 V • 3~

KRONOS 250T

NEW

400 V • 3~

250 A ⚡ ⌀ 200/300




KRONOS 320T

NEW

400 V • 3~

320 A ⚡ ⌀ 200/300



KRONOS 400T Duo

NEW

400 V • 3~

400 A ⚡ ⌀ 200/300

no accessories :
075337

KRONOS 400T W

NEW

400 V • 3~

400 A ⚡ ⌀ 200/300

no accessories :
075511

 EN60974-1	 MADE IN FRANCE			 Norm	 min → max	 EN60974-1 (40°C)													 Equipement d'origine Original equipment Originalausstattung Equipamiento de fabrica		Cooling system	Protection			
		50/60 Hz	↔	A	A	IA (60%)	X% (I2 max)	100%	U0 (V)	Electronic Control	W	m/min (max)	200 mm 5 kg	300 mm 15 kg	GAS	NO GAS	mm	TYPE	cm / kg	kg			Protected & compatible power generator (+/-15%)		
KRONOS 250M	230V 1~	5 m	16		15 → 250	150 A	20 %	130 A	76 V		50 W	20	■	■	0.8 → 1.2	0.9 → 1.6	0.8 / 1.0	B-042360	1.0	Air	IP 23S	75 x 45 x 80	46	15 kW	18 kVA
KRONOS 250T	400V 3~	5 m	16		15 → 250	200 A	35 %	170 A	69 V		50 W	20	■	■	0.8 → 1.2	0.9 → 1.6	1.0 / 1.2	B-046849	1.0	Air	IP 23S	75 x 45 x 80	46	20 kW	24 kVA
KRONOS 320T	400V 3~	5 m	16		15 → 320	240 A	35 %	190 A	69 V		50 W	20	■	■	0.8 → 1.2	0.9 → 1.6	1.0 / 1.2	B-046849	1.2	Air	IP 23S	75 x 45 x 80	46	20 kW	24 kVA
KRONOS 400T Duo	400V 3~	5 m	32		15 → 400	300 A	35 %	280 A	66 V		50 W	20	■	■	0.8 → 1.2	0.9 → 1.6	1.0 / 1.2	B-046849	–	Air	IP 23S	90 x 55 x 67	55	25 kW	30 kVA
KRONOS 400T W	400V 3~	5 m	32		15 → 400	300 A	35 %	280 A	66 V		50 W	20	■	■	0.8 → 1.2	0.9 → 1.6	1.0 / 1.2	B-046849	–	Liquid, 800 W	IP 23S	90 x 55 x 80	53	25 kW	30 kVA

KRONOS

MIG/MAG • INVERTER • DIGITAL



KRONOS

MIG/MAG INVERTER

DIGITAL • 400 V • 3~

NEW

4
in 1

GAS

NO GAS



POWER SOURCE • 400 V • 3~



DOUBLE • 400 V • 3~

KRONOS 400T G

NEW

400 V • 3~

400 A ⚡ ⬆ ⬆ ⌀ 200/300

no accessories :
075054



KRONOS 400T GW

NEW

400 V • 3~

400 A ⚡ ⬆ ⬆ ⌀ 200/300

no accessories :
075061



KRONOS 400T Duo

NEW

400 V • 3~

400 A ⚡ ⬆ ⬆ ⌀ 200/300

no accessories :
075337



Faisceaux de liaison - Connection cable - Zwischenschlauchpakete



AIR COOLED

5 m 70 mm² 075443
10 m 70 mm² 075450
10 m 95 mm² 077553

LIQUID COOLED

1.8 m 70 mm² 075467
5 m 70 mm² 075474
10 m 70 mm² 075481
10 m 95 mm² 075504



Pressure-regulator kit 5-30 L/min -
Kit débitmètre 5-30 L/min
073395



NEW



PUSH-PULL torch connection
for WF 50
078741



EN60974-1



MADE IN FRANCE



50/60 Hz



Norm



min → max



EN60974-1 (40°C)



Electronic control



W



m/min (max)



200 mm 5 kg



300 mm 15 kg



Ø mm



GAS



NO GAS



1.0 / 1.2



B-046849



TYPE



Cooling system



cm / kg



kg



Protected & compatible power generator (+/-15%)

Speed control
with tachymeter
20 m/min max

MIG WIRE FEEDERS

WF 35

50 W

Smart wire charge

075078



3.5" display

WF 50

100 W

Smart wire charge

Light

075108



5" display



KRONOS 400T W

pack KRONOS 400T W 1 077744	500 A, 4m, liquid 041004	—	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	—
pack KRONOS 400T W 2 077751	—	500 A, 3m, liquid 046160	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	B-type, Alu, Ø1.0/1.2 (x2) 040915

KRONOS 400T G

pack KRONOS 400T G 1 077768	350 A, 4m, air 063792	—	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	—	5 m, Ø70 mm ² , air 075443	WF 35 075078
pack KRONOS 400T G 2 077775	—	350 A, 3m, air 063808	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	B-type, Alu, Ø1.0/1.2 (x2) 040915	5 m, Ø70 mm ² , air 075443	WF 35 075078
pack KRONOS 400T G 3 077782	350 A, 4m, air 063792	—	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	—	10 m, Ø70 mm ² , air 075450	WF 35 075078
pack KRONOS 400T G 4 077799	—	350 A, 3m, air 063808	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	B-type, Alu, Ø1.0/1.2 (x2) 040915	10 m, Ø70 mm ² , air 075450	WF 35 075078

KRONOS 400T GW

pack KRONOS 400T GW 1 077805	500 A, 4m, liquid 041004	—	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	—	5 m, Ø70 mm ² , liquid 075474	WF 35 075078
pack KRONOS 400T GW 2 077812	—	500 A, 3m, liquid 046160	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	B-type, Alu, Ø1.0/1.2 (x2) 040915	5 m, Ø70 mm ² , liquid 075474	WF 35 075078
pack KRONOS 400T GW 3 077829	500 A, 4m, liquid 041004	—	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	—	10 m, Ø70 mm ² , liquid 075481	WF 35 075078
pack KRONOS 400T GW 4 077836	—	500 A, 3m, liquid 046160	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	B-type, Alu, Ø1.0/1.2 (x2) 040915	10 m, Ø70 mm ² , liquid 075481	WF 35 075078

KRONOS 400T Duo

pack KRONOS 400T Duo 1 077706	350 A, 4m, air 063792	—	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	—	—	—
pack KRONOS 400T Duo 2 077713	—	350 A, 3m, air 063808	4 m, 50 mm ² 047853	—	B-type, Alu, Ø1.0/1.2 (x2) 040915	—	—
pack KRONOS 400T Duo 3 077720	350 A, 4m, air 063792	350 A, 3m, air 063808	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	B-type, Alu, Ø1.0/1.2 (x2) 040915	5 m, Ø70 mm ² , air 075443	WF 35 075078
pack KRONOS 400T Duo 4 077737	350 A, 4m, air 063792	350 A, 3m, air 063808	4 m, 50 mm ² 047853	Ø1.0/1.2 (original equipment)	B-type, Alu, Ø1.0/1.2 (x2) 040915	10 m, Ø70 mm ² , air 075450	WF 35 075078

KRONOS
MIG/MAG • INVERTER • DIGITAL

51



EN60974-1



MADE IN FRANCE



Electronic control



W



m/min (max)



200 mm 5 kg



300 mm 15 kg



Ø mm



GAS



NO GAS



1.0 / 1.2



B-046849



TYPE



Cooling system



cm / kg



kg



Protected & compatible power generator (+/-15%)



Air



Liquid



800 W



58 x 26 x 48



14



25 kW



30 kVA



Air



Liquid



58 x 26 x 48



15



25 kW



30 kVA



Air



Liquid



58 x 26 x 48



15



25 kW



30 kVA



NEOMIG-I / NEOPULSE

5" DIGITAL INTERFACE

NEW

ACCESSIBILITY

2 interface levels



10 languages

- French
- English
- German
- Italian
- Spanish
- Czech
- Dutch
- Russian
- Chinese
- Japanese

Expert mode




MIG

MANUAL	STANDARD SYNERGIC
SPOT	SPOT DELAY

MANUAL

QUICK LOAD




CONNECTIVITY

TRACEABILITY

History data export


Q MOS - WPQR
D MOS - WPS



ENERGY CONTROL : 20 kHz, kJ or kJ/cm

PORTABILITY

Share configuration & jobs



SOFTWARE UPDATE

Neopulse/Neomig-i evolutions



NEOMIG-i 400 G

	Fe/CrNi	Alu		Fe/CrNi	Alu				
pack NEOMIG-i 400 G W1 077843	500 A, 4m, liquid 041004	—	4 m, 70 mm ² 043831	Ø1.0/1.2 (original equipment)	—	10 m, Ø70 mm ² , liquid 075481	WF 50 075108	Koolweld 2 075115	10m ³ L 075498
pack NEOMIG-i 400 G W2 077850	—	500 A, 3m, liquid 046160	4 m, 70 mm ² 043831	Ø1.0/1.2 (original equipment)	F-type, Alu, Ø1.0/1.2 (x4) 061903	10 m, Ø70 mm ² , liquid 075481	WF 50 075108	Koolweld 2 075115	10m ³ L 075498
pack NEOMIG-i 400 G W3 077867	500 A, 4m, liquid 041004	—	4 m, 70 mm ² 043831	Ø1.0/1.2 (original equipment)	—	10 m, Ø95 mm ² , liquid 075504	WF 50 075108	Koolweld 2 075115	10m ³ L 075498
pack NEOMIG-i 400 G W4 077874	—	500 A, 3m, liquid 046160	4 m, 70 mm ² 043831	Ø1.0/1.2 (original equipment)	F-type, Alu, Ø1.0/1.2 (x4) 061903	10 m, Ø95 mm ² , liquid 075504	WF 50 075108	Koolweld 2 075115	10m ³ L 075498
NEOMIG-i 500 G									
pack NEOMIG-i 500 G W1 077881	500 A, 4m, liquid 041004	—	4 m, 70 mm ² 043831	Ø1.0/1.2 (original equipment)	—	10 m, Ø95 mm ² , liquid 075504	WF 50 075108	Koolweld 2 075115	10m ³ L 075498
pack NEOMIG-i 500 G W2 077898	—	500 A, 3m, liquid 046160	4 m, 70 mm ² 043831	Ø1.0/1.2 (original equipment)	F-type, Alu, Ø1.0/1.2 (x4) 061903	10 m, Ø95 mm ² , liquid 075504	WF 50 075108	Koolweld 2 075115	10m ³ L 075498



NEOMIG-I

MIG/MAG INVERTER DIGITAL • 3~

NEW



WIRE FEEDERS

Speed control with tachymeter
20 m/min max



WF 35
50 W
Smart wire charge
075078



WF 50
100 W
Smart wire charge
Light
075108



IP 23 INDOOR / OUTDOOR



NEOMIG-I 400 G

400 A @ 100 %

no accessories/no trolley
075085

NEOMIG-I 500 G

500 A @ 60 %

no accessories/no trolley
075092

OPTIONS

Faisceaux de liaison - Connection cables - Zwischenschlauchpakete
p. 50




USB key
16 Go/GB
062344



Pressure-regulator kit 5-30 L/min -
Kit débitmètre 5-30 L/min
for WF 35 / WF 50
073395



PUSH-PULL torch connection
for WF 50
078741



CE NORM. EN60974-1	MADE IN FRANCE	50 / 60 Hz	↔	A	A	min → max	EN60974-1 (40°C) MIG	I (60%)	X% (I2 max)	100%	Uo	PUSH/PULL	Electronic Control	W	m/min (max)	200 mm 5 kg	300 mm 15 kg	GAS	NO GAS	Ø mm	TYPE	cm	kg	Protected & compatible power generator (+/-15%)
NEOMIG-I 400 G		400 V - 3 ~	5 m	32	15 → 400		400 A	100 %	400 A	85 V											68 x 30 x 48	37	30 kW	36 kVA
NEOMIG-I 500 G		400 V - 3 ~	5 m	32	15 → 500		470 A	60 %	400 A	85 V											68 x 30 x 48	37	30 kW	36 kVA
WF 50							500 A	60 %				OPTION		100 W	20			0.8 → 1.6	0.9 → 2.4	1.0 / 1.2	F-061873	58 x 26 x 48	15	

WF MIG WIRE FEEDER

- ✓ NEOPULSE 320C
- ✓ NEOPULSE 400 CW
- ✓ NEOPULSE 400G
- ✓ NEOPULSE 500G

NEOFEED 4W

AIR

* LIQUID

IP 23



PUSH PULL
COMPATIBILITY
24/42V

connection cable not included
014527



EN60974-1 (40°C)												
IA 60%	X% I2 max	Electronic Control	m/min	200	300	GAS	NO GAS		TYPE	cm	kg	
500	60		22	■	■	0.6 + 1.6	0.9 + 2.4	1.0 / 1.2 mm	F-061873	70 x 51 x 38	20.5	

OPTIONS

CONNECTION CABLES



		AIR COOLED	LIQUID COOLED
1.8 m	70 mm²	071780	037243
5 m	70 mm²	047587	047617
10 m	70 mm²	047594	047624
10 m	95 mm²	047600	047631
15 m	95 mm²	038349	038448
20 m	95 mm²	038431	038455

ROLLERS

047020



SKIS

047037



NEOPULSE 320C & 400CW CONFIGURATION 1



Connection kit

NUM-1
063938



CONFIGURATION 2



Connection kit

NUM-1
063938



NEOPULSE 400G & 500G CONFIGURATION 1



No connection
kit

CONFIGURATION 2



Connection kit

NUM-1
063938



EXTEND PRODUCTIVITY

x2 DOUBLE WIRE FEEDER

- ✓ NEOPULSE 400G
- ✓ NEOPULSE 500G



DOUBLE WIRE FEEDER OPTIONS




Fixation kit
for trolley T/M 400A
064690



TWINCOOL
Cooling unit 1000 W, 5.5 L
liquid not included
065086

NEOPULSE 400G & 500G CONFIGURATION 1




Connection kit

NUM-2
064942



CONFIGURATION 2



Connection kit

NUM-2
064942



+ NUM MIG 1
062993



+ NUM-1
063938



REMOTE CONTROL

- ✓ NEOPULSE 320C
- ✓ NEOPULSE 400 CW
- ✓ NEOPULSE 400G
- ✓ NEOPULSE 500G
- ✓ NEOFEED 4W

RC-HD2



SOFTWARE UPDATE

command cable not included
062122



included fixation



Command cable

2.8 m 063907

6 m 063914

11 m 036925



10 pts, male
064355

10 pts, female
064362


OPTIONS



MAGNETFIX 50
029637



Fixing kit 2
for trolley T/M 400A
037779

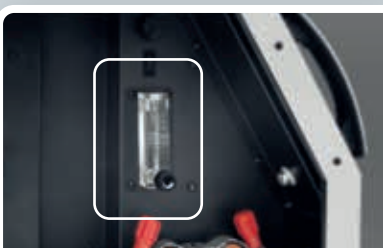

Pressure-regulator kit 5-30 L/min -
Kit débitmètre 5-30 L/min

- ✓ NEOFEED 4W
- ✓ NEOPULSE 320 C
- ✓ NEOPULSE 400 CW

073395



OPTIONS

RC-HA2
10m
047679



Push Pull (24V/42V)

Connector 14pt, male
047686

Connector 14pt, female
064386

Skate
for NEOPULSE 320C + WCU
037717




USB key
16 Go/GB
included
062344



Trolley - T/M 400
for NEOPULSE
320C, 400G & 500G
1105 x 1135 x 540 mm
037328




Filter kit
063143



Cooling liquid
(not included)

5L
062511

10L
052246





NEOPULSE 220C							
pack NEOPULSE 220C A1 062801		TYPE B, Ø 0.8/1 (x2) (Original Equipment)	4 m, 35 mm ² 043817			250 A, 3 m, air 040700	
pack NEOPULSE 220C A2 062818		TYPE B, Ø 0.8/1 (x2) (Original Equipment)	TYPE B, Alu, Ø 1/1.2 (x2) 040915	4 m, 35 mm ² 043817			250 A, 3 m, air 040724




NEOPULSE 220C XL							
pack NEOPULSE 220C XL A1 062825		TYPE B, Ø 0.8/1 (x2) (Original Equipment)	4 m, 35 mm ² 043817			250 A, 4 m, air 040922	
pack NEOPULSE 220C XL A2 062832		TYPE B, Ø 0.8/1 (x2) (Original Equipment)	TYPE B, Alu, Ø 1/1.2 (x2) 040915	4 m, 35 mm ² 043817			250 A, 3 m, air 040724



NEOPULSE 320C							
pack NEOPULSE 320C A1 062849		TYPE F, Ø 1/1.2 (x4) (Original Equipment)	4m, 70 mm ² 036994			350 A, 4 m, air 040946	
pack NEOPULSE 320C A2 062856		TYPE F, Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu, Ø 1/1.2 (x4) 061903	4m, 70 mm ² 036994			350 A, 3 m, air 040731
pack NEOPULSE 320C W1 062863	WCU 1kW C 013537	TYPE F, Ø 1/1.2 (x4) (Original Equipment)	4m, 70 mm ² 036994	T/M 400 037328		300 A, 4 m, liquid 043275	
pack NEOPULSE 320C W2 062870	WCU 1kW C 013537	TYPE F, Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu, Ø 1/1.2 (x4) 061903	4m, 70 mm ² 036994	T/M 400 037328		300 A, 3 m, liquid 040748
pack NEOPULSE 320C W3 063402	WCU 1kW C 013537	TYPE F, Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu, Ø 1/1.2 (x4) 061903	4m, 70 mm ² 036994	Skate 037717		300 A, 3 m, liquid 040748



NEOPULSE 400CW							
pack NEOPULSE 400CW 1 071483			4m, 70 mm ² 043831			500 A, 4 m, liquid 041004	
pack NEOPULSE 400CW 2 071490		TYPE F, Alu, Ø 1/1.2 (x4) 061903	4m, 70 mm ² 043831				500 A, 3 m, liquid 046160

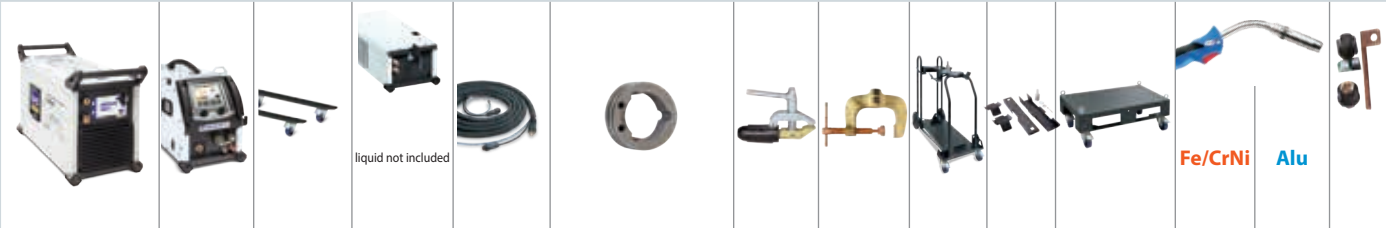

NEOPULSE 400G														
pack NEOPULSE 400G A1 062887	NEOFEED 4W 014527			5 m, air, ø 70 mm² 047587	TYPE F, Ø 1/1.2 (x4) (Original Equipment)		4m, 70 mm² 043831		T/M 400 037328			450 A, 4 m, air 045392		
pack NEOPULSE 400G W1 062894	NEOFEED 4W 014527		NEOCOOL 1000W 032750	10 m, liquid, ø 95 mm² 047631	TYPE F, Ø 1/1.2 (x4) (Original Equipment)		4m, 70 mm² 043831		T/M 400 037328			500 A, 4 m, liquid 041004		
pack NEOPULSE 400G W2 062900	NEOFEED 4W 014527		NEOCOOL 1000W 032750	10 m, liquid, ø 95 mm² 047631	TYPE F Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu Ø 1/1.2 (x4) 061903	4m, 70 mm² 043831		T/M 400 037328				500 A, 3 m, liquid 046160	
pack NEOPULSE 400G W3 066533	×2 NEOFEED 4W 014527		TWINCOOL 1000W 065086	×2 10 m, liquid, ø 95 mm² 047631	TYPE F Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu Ø 1/1.2 (x4) 061903	4m, 70 mm² 043831		T/M 400 037328	fixation kit 064690		500 A, 4 m, liquid 041004	500 A, 3 m, liquid 046160	Kit NUM-2 064942
pack NEOPULSE 400G W4 066540	×2 NEOFEED 4W 014527	×2 Rollers 047020	TWINCOOL 1000W 065086	×2 10 m, liquid, ø 95 mm² 047631	TYPE F Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu Ø 1/1.2 (x4) 061903	4m, 70 mm² 043831				Pallet trolley 064621	500 A, 4 m, liquid 041004	500 A, 3 m, liquid 046160	Kit NUM-2 064942
pack NEOPULSE 400G W5 072718	NEOFEED 4W 014527		NEOCOOL 1000W 032750	10 m, liquid, ø 70 mm² 047624	TYPE F, Ø 1/1.2 (x4) (Original Equipment)				T/M 400 037328					
pack NEOPULSE 400G W6 072725	NEOFEED 4W 014527		NEOCOOL 1000W 032750	10 m, liquid, ø 70 mm² 047624	TYPE F, Ø 1/1.2 (x4) (Original Equipment)		4m, 50 mm² 047853		T/M 400 037328			500 A, 4 m, liquid 041004		
pack NEOPULSE 400G W7 072732	NEOFEED 4W 014527		NEOCOOL 1000W 032750	10 m, liquid, ø 70 mm² 047624	TYPE F Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu Ø 1/1.2 (x4) 061903	4m, 50 mm² 047853		T/M 400 037328				500 A, 3 m, liquid 046160	



NEOPULSE 500G													
pack NEOPULSE 500G A1 062917	NEOFEED 4W 014527			10 m, air, ø 95 mm ² 047600	TYPE F, Ø 1/1.2 (x4) (Original Equipment)		4m, 95 mm ² 047013	T/M 400 037328			450 A, 4 m, air 045392		
pack NEOPULSE 500G W1 062924	NEOFEED 4W 014527		NEOCOOL 1000W 032750	10 m, liquid, ø 95 mm ² 047631	TYPE F, Ø 1/1.2 (x4) (Original Equipment)		4m, 95 mm ² 047013	T/M 400 037328			500 A, 4 m, liquid 041004		
pack NEOPULSE 500G W2 062931	NEOFEED 4W 014527		NEOCOOL 1000W 032750	10 m, liquid, ø 95 mm ² 047631	TYPE F Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu Ø 1/1.2 (x4) 061903	4m, 95 mm ² 047013	T/M 400 037328				500 A, 3 m, liquid 046160	
pack NEOPULSE 500G W3 066557	x2 NEOFEED 4W 014527		TWINCOOL 1000W 065086	x2 10 m, liquid, ø 95 mm ² 047631	TYPE F Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu Ø 1/1.2 (x4) 061903	4m, 95 mm ² 047013	T/M 400 037328	fixation kit 064690		500 A, 4 m, liquid 041004	500 A, 3 m, liquid 046160	Kit NUM-2 064942
pack NEOPULSE 500G W4 066564	x2 NEOFEED 4W 014527	x2 Rollers 047020	TWINCOOL 1000W 065086	x2 10 m, liquid, ø 95 mm ² 047631	TYPE F Ø 1/1.2 (x4) (Original Equipment)	TYPE F, Alu Ø 1/1.2 (x4) 061903	4m, 95 mm ² 047013			Pallet trolley 064621	500 A, 4 m, liquid 041004	500 A, 3 m, liquid 046160	Kit NUM-2 064942

INTEGRATION




ONLINE CONFIGURATION GUIDE

MIG/MAG - GMAW/FAW

	I (100%)	Integrated wirefeeder	SAM-1A (Analogic/Digital)	SAM-1N (Numerical)
NEOPULSE 320 C	280 A	✓	✓	✓
NEOPULSE 400 CW	360 A	✓	✓	✓
NEOPULSE 400 G	360 A	—	✓	✓
NEOPULSE 500 G	440 A	—	✓	✓
EXAGON 400 FLEX CC/CV	350 A	—	✓	✓
TIG - GTAW				
TITAN 400 DC	360 A	—	✓	✓
TITANIUM 230 AC/DC	170 A	—	—	✓
TITANIUM 400 AC/DC	360 A	—	✓	✓

ROBOT	COBOT	PLC
ABB ✓✓	DOOSAN ✓✓	BECKHOFF ✓✓
FANUC ✓✓	HANWHA ✓✓	PROFACE ✓✓
KAWASAKI ✓✓	JAKA ✓✓	ROCKWELL AUTOMATION ✓✓
KUKA ✓✓	OMRON ✓✓	SCHNEIDER ELECTRIC ✓✓
STÄUBLI ✓✓	TECHMEN ROBOT ✓✓	SIEMENS ✓✓
YASKAWA ✓✓	UNIVERSAL ROBOTS ✓✓	UNITRONICS ✓✓
...	...	WAGO ✓✓

Complete with -
Complétez avec

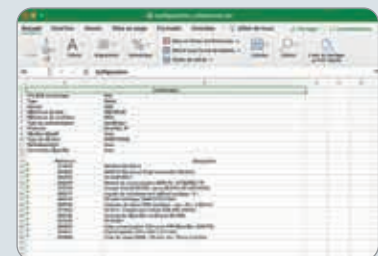

Complete configuration

A summary of the requested set-up configuration as an Excel file along with a list of the GYS equipments needed to automate it.
- Récapitulatif de la configuration souhaitée au format Excel avec les équipements GYS nécessaires à l'automatisation.




Back-End

Zip file with :
• 3D models (.step)
• IP configuration
• Software
• Electronic files




Front-End

User interfaces :
• URcap software
• More on demand...



AUTOMATION MODULE



Youtube

POWER SOURCE · PLC/ROBOT/COBOT CONNECTION



1 MACHINE CONNECTIVITY KITS



KIT NUM TIG/GTAW 1
for TITAN 400 DC & TITANIUM 400 AC/DC
037960

KIT NUM MIG/GMAW 1
for NEOPULSE 320C, 400 CW, 400G & 500G
062993

2 SMART AUTOMATION MODULE SAM 1N 064935



3 ANYBUS CONNECTORS



Ethernet IP	062078
Profinet	062085
Modbus TCP	063013
Devicenet	062092
Can Open	062108
Ethercat	063006

1 SMART AUTOMATION MODULE SAM 1A 071940



Analogic /Digital



8 inputs
7 outputs




Integrated
SAFETY function



3 modes :
Job, Manual,
Tracking

POWER SOURCE · PLC/ROBOT/COBOT CONNECTION



SMARTFEED

ROBOTIC WIRE FEEDER

4 SMARTFEED M-4 066618

IP 21 MOTOR 115 W



Front view


4 NEW SMARTFEED MB-PP 073647

IP 21 BRUSHLESS MOTOR 100 W



Front view

PUSH-PULL
BRUSHLESS MOTOR



High quality

POWER SOURCE · PLC/ROBOT/COBOT CONNECTION



ULTRA LIGHT
4.5 kg

VIBRATION &
SHOCK RESISTANT



15 cm

24.5 cm

21.5 cm

Back view

EN60974-1 (40°C)	Electronic Control	Equipement d'origine - Original equipment - Originalausstattung - Equipamiento de fabrica	TYPE	m/min	PUSH-PULL	GAS	NO GAS	cm	kg
IA 60%	X% 12 max	1.0/1.2 mm	F-061873	1+25	■	0.6+1.6	0.9+2.4	24.5 x 15 x 21.5	4.5

Options

Robotic MIG connection cables

Liquid, 4 m, Ø 95mm²
073517
Liquid, 8 m, Ø 95mm²
069725
Liquid, 12 m, Ø 95mm²
078581



Kit n°20 Cable guide

075429



Kit n°21 Cable fixation

077324



Command cable, 4 m
073524
Command cable, 8 m
073531

Smartfeed support for ROBOT kits

Kit n°1	070707	✓ ABB
Kit n°2	071445	✓ FANUC
Kit n°3	071452	✓ KAWASAKI
Kit n°4	071469	✓ KUKA
...	...	✓ YASKAWA

MORE
COMING SOON

Compatibilities on demand -
Compatibilités sur demande -
Kompatibilitäten auf Anfrage





PACKS



More configurations -
Plus de configurations



TIG
GTAW
MIG/MAG
GMAW/FCW
PLASMA
CUTTING


COBOT

✓ DOOSAN
✓ HANWHA


✓ OMRON
✓ TECHMAN

✓ UNIVERSAL ROBOT


PACK NEOPULSE 320C A3 COBOT
067905

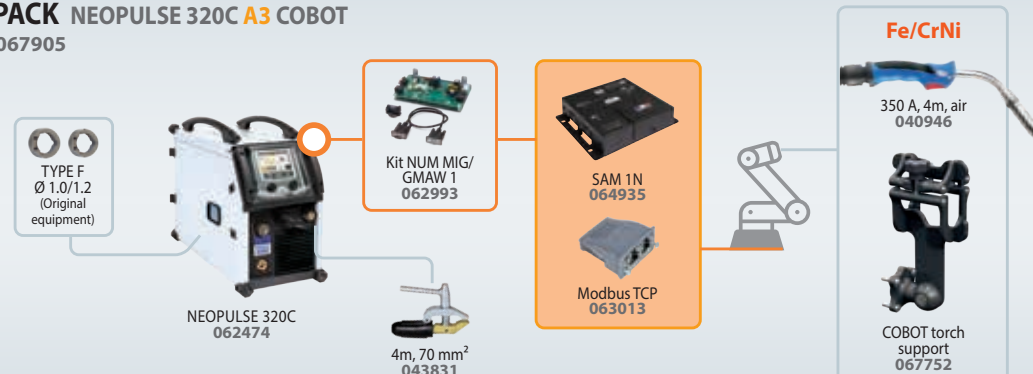

PACK NEOPULSE 320C W4 COBOT
067912

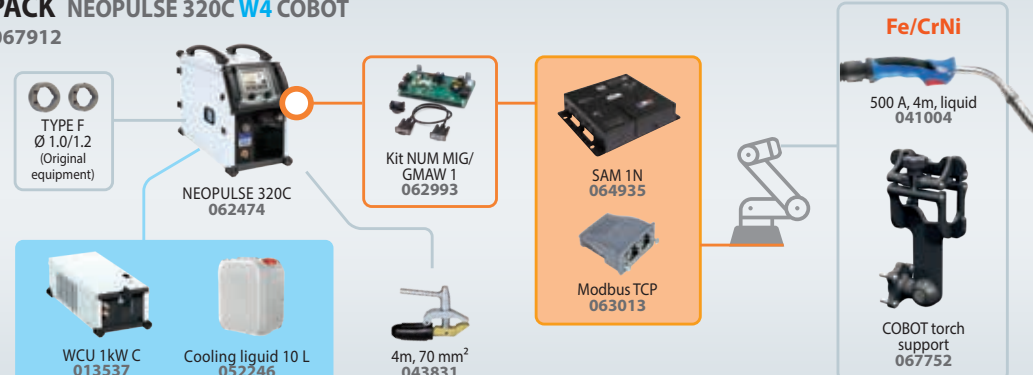

PACK NEOPULSE 400 CW 3 COBOT
071506

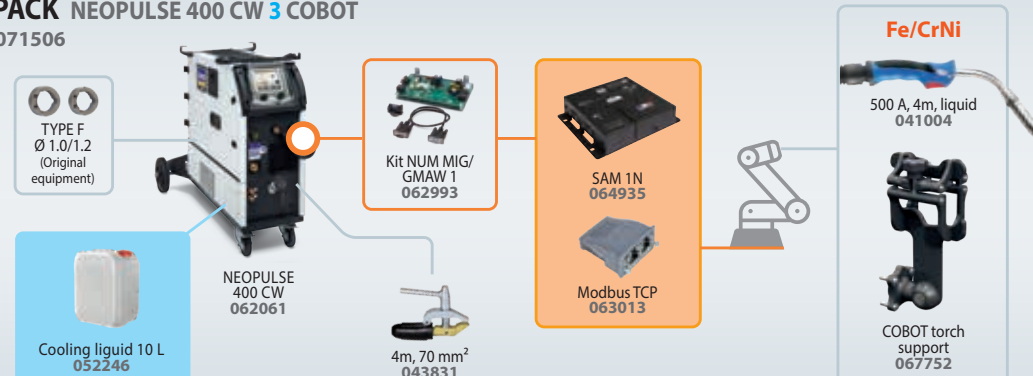

ROBOT

✓ ABB
✓ FANUC


✓ KAWASAKI
✓ KUKA

✓ STÄUBLI
✓ YASKAWA

PACK 1 NEOPULSE 400G ETHERNET IP
071575




PACK 2 NEOPULSE 500G ETHERNET IP
071582

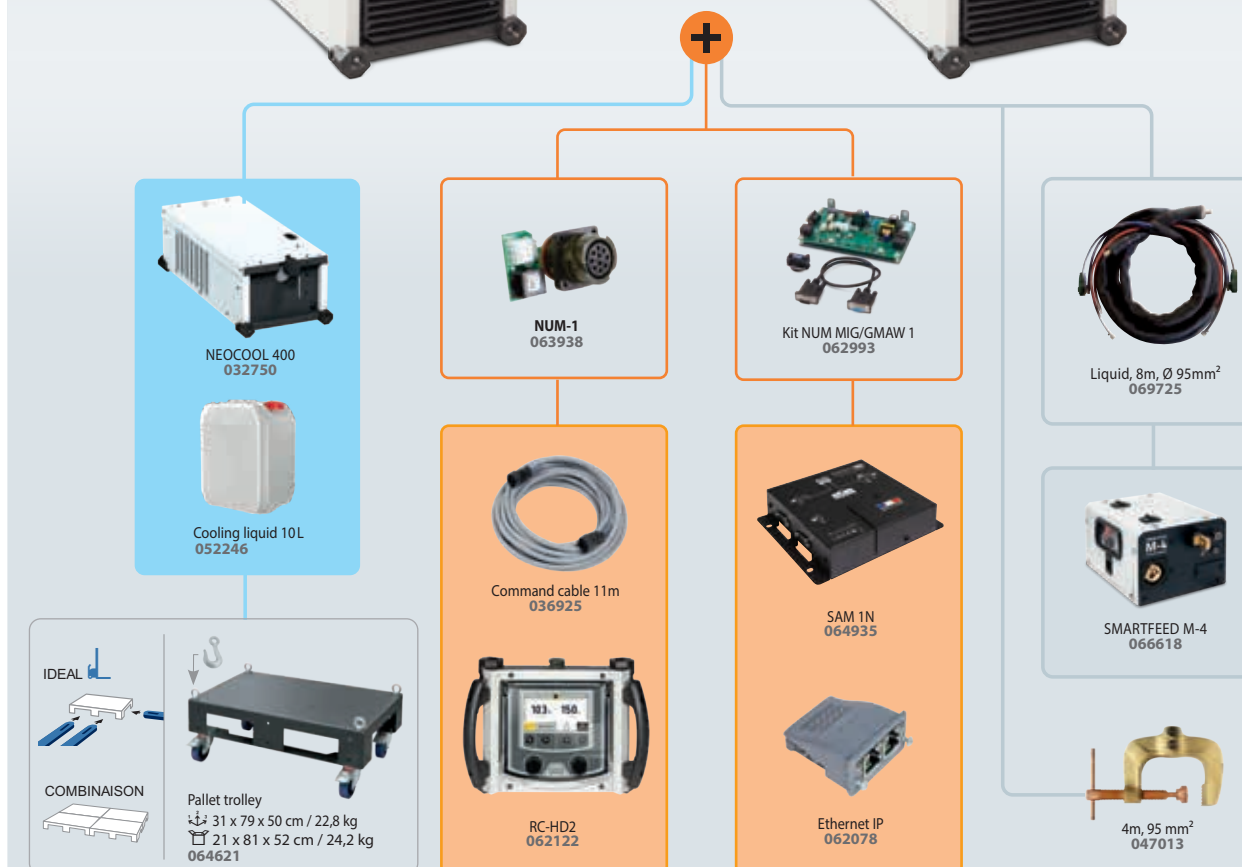



EXAGON

MIG/MAG MULTIPROCESS INVERTER CC/CV



VRD inside Voltage Reduction Device

MEMORY : 50 MMA JOBS + 50 TIG JOBS

QUICK ACCESS
Program charge mode easy

EASY USB UPDATE
DIRECT COMPUTER



V/A control

Arcforce/Inductance control

SECURITY

Lock/Unlock parameters

Remote control



SR

VRD inside

HS

AF

CEL

cellulosic

IP 23

ALU aluminium



IP 23

INDOOR /
OUTDOOR

MMA PULSE

TIG LIFT

GOUGING

AD



65

EXAGON

MULTIPROCESS INVERTER CC/CV

EXAGON 400 CC/CV

400 V • 3 ~

400 A

400A

60 %

no accessories
010925

7 in 1

- 1 MMA
- 2 MMA • PULSE
Kits MMA p. 14
- 3 TIG DC LIFT
Torches & consumables p. 31
- 4 GOUGING
Accessories p. 15
- 5 MIG Wire feeder
EXAFEED 4L
- 6 MIG Portable feeder
NOMADFEED 425-4 CC/CV
- 7 TIG HF
EXATIG

3 COMBINATIONS Complete packs & details - p.66/67



70/95 mm²
Ø 13 mm

FLEX

208V

525V

1~

3~

EXAGON 400 FLEX CC/CV

208 ~ 525 V • 1 ~ 3 ~

400 A

400A

60 %

no accessories
069718

5 in 1

- 1 MMA
- 2 MMA • PULSE
Kits MMA p. 14
- 3 TIG DC LIFT
Torches & consumables p. 31
- 4 GOUGING
Accessories p. 15
- 5 MIG Portable feeder
NOMADFEED 425-4 CC/CV

NEW
2023

AUTOMATION

SAM Automation module compatibility
SAM-1N/1A MIG/GMAW (details p.61)



AUTOMATE / ROBOT

NOMADFEED COMBINATION
Complete packs & details - p.66/67



Trolley
Jobsite XL
039568



70/95 mm²
Ø 13 mm

PFC
EN 61000-3-12
POWER FACTOR
CORRECTION

OPTIONS

Only for Exagon 400 CC/CV

EXACOOOL

LIQUID

1000 W,
cooling unit (5.5l)
liquid not included
032422



Cooling liquid
(not included)
5L
062511

10L
052246



Trolley
T/M 400

1105x
1135x540 mm
037328



Jobsite XL

118x
61x60 mm
039568



Filter kit
046580



REMOTE CONTROL
RC-HA1

8 m 045675
20 m 066625



		~			I ₂			INTEGRATED TECHNOLOGY												X _g GYS (20°C)	EN60974-1 (40°C)									
			50 / 60 Hz	A	MMA	TIG	MIG	PFC	FLEX	SR	VRD	HS	AF	CEL	ALU	MMA PULSE	TIG Lift	AD	IP23	for normal use	I (60%)	X% (I2 max)	100%	U _o	cm / kg	Protected & compatible power generator (+/-15%)				
EXAGON 400 CC/CV			3	400 V	32A	5 → 400	5 → 400	15 → 400	—	—	■	■	⚙	⚙	■	■	■	■	■	■	■	■	100% @ 350 A	400 A	60%	350 A	84 V	58 x 52 x 30 / 36	30 kW	36 kVA
EXAGON 400 FLEX CC/CV			1	208 → 300V	63	15 → 270	10 → 270	10 → 270	■	■	■	■	⚙	⚙	■	■	■	■	■	■	100% @ 220 A	270 A	60%	220 A	80 V	66 x 52 x 30 / 36	30 kW	36 kVA		
				300 → 525V	32																100% @ 350 A	400 A	60%	350 A						
			3	208 → 300V	63	15 → 400	10 → 400	10 → 400													100% @ 350 A	400 A	60%	350 A						
				300 → 525V	32																									

Packs MIG

 liquid not included Fe/CrNi									
EXAGON 400 CC/CV									
pack EXAGON MAG A1 012417	EXAFEED 4L 032408		10 m, air, ø 70 mm ² 047594		TYPE C, Ø 1/1.2 (Original Equipment)	4m, 70 mm ² 043831	T/M 400 037328		350 A, 4 m, air 040946
pack EXAGON MAG A2 013377	EXAFEED 4L 032408		5 m, air, ø 70 mm ² 047587		TYPE C, Ø 1/1.2 (Original Equipment)	4m, 70 mm ² 043831	T/M 400 037328		350 A, 4 m, air 040946
pack EXAGON MAG W1 012424	EXAFEED 4L 032408	EXACOOOL 1000W 032422	10 m, liquid, ø 95 mm ² 047631		TYPE C, Ø 1/1.2 (Original Equipment)	4m, 70 mm ² 043831	T/M 400 037328		500 A, 4 m, liquid 041004
pack EXAGON MAG W2 013384	EXAFEED 4L 032408	EXACOOOL 1000W 032422	5 m, liquid, ø 70 mm ² 047617		TYPE C, Ø 1/1.2 (Original Equipment)	4m, 70 mm ² 043831	T/M 400 037328		500 A, 4 m, liquid 041004
pack EXAGON MAG A5 013421				NOMADFEED 425-4 036291	5 m, ø 95 mm ² 032439	TYPE C, Ø 1/1.2 (Original Equipment)	4m, 70 mm ² 043831		450 A, 4 m, air 045392
pack EXAGON MAG A6 013438				NOMADFEED 425-4 036291	5 m, ø 95 mm ² 032439	TYPE C, Ø 1/1.2 (Original Equipment)	4m, 70 mm ² 043831	Jobsite XL 039568	450 A, 4 m, air 045392
EXAGON 400 FLEX CC/CV									
pack EXAGON FLEX MAG A3 076327				NOMADFEED 425-4 036291	5 m, ø 95 mm ² 032439	TYPE C, Ø 1/1.2 (Original Equipment)	4m, 70 mm ² 043831		450 A, 4 m, air 045392
pack EXAGON FLEX MAG A4 076334				NOMADFEED 425-4 036291	5 m, ø 95 mm ² 032439	TYPE C, Ø 1/1.2 (Original Equipment)	4m, 70 mm ² 043831	Jobsite XL 039568	450 A, 4 m, air 045392

Packs MMA

					
EXAGON 400 CC/CV					
pack EXAGON MMA 1 012387	5 m, 50 mm ² MMA kit 7 047419	4 m, 50 mm ²			
pack EXAGON MMA 2 012394	5 m, 50 mm ² MMA kit 7 047419	4 m, 50 mm ²			Jobsite XL 039568
pack EXAGON MMA 3 012400	5 m, 50 mm ² MMA kit 7 047419	4 m, 50 mm ²	Gouging torch, 1000 A 041516	Cable 5 m for gouging torch 040670	Jobsite XL 039568
EXAGON 400 FLEX CC/CV					
pack EXAGON FLEX MMA 1 076235	5 m, 50 mm ² MMA kit 7 047419	4 m, 50 mm ²			
pack EXAGON FLEX MMA 2 076242	5 m, 50 mm ² MMA kit 7 047419	4 m, 50 mm ²			Jobsite XL 039568
pack EXAGON FLEX MMA 3 076259	5 m, 50 mm ² MMA kit 7 047419	4 m, 50 mm ²	Gouging torch, 1000 A 041516	Cable 5 m for gouging torch 040670	Jobsite XL 039568

Packs TIG

						
EXAGON 400 CC/CV						
pack EXAGON TIG 1 062597	EXATIG 013780	SR26 L, 8 m 046184	4 m, 50 mm ² 047853	Command cable, 11 m 036925	10 m, ø95 mm ² 032446 (x2)	
pack EXAGON TIG 2 062603	EXATIG 013780	SR26 L, 8 m 046184	4 m, 50 mm ² 047853	Command cable, 11 m 036925	10 m, ø95 mm ² 032446 (x2)	Jobsite XL 039568
pack EXAGON TIG 3 062948	EXATIG 013780	SR26 DB, 8 m 046177	4 m, 50 mm ² 047853	Command cable, 11 m 036925	10 m, ø95 mm ² 032446 (x2)	

MIG ✓ EXAGON 400 CC/CV
✗ EXAGON 400 FLEX CC/CV



WIRE FEEDER

PUSH PULL
COMPATIBILITY



AIR ❄ LIQUID

CONNECTION CABLE	AIR COOLED		
	5 m	70 mm ²	047587
	10 m	70 mm ²	047594
	10 m	95 mm ²	047600
	15 m	95 mm ²	038349
	LIQUID COOLED		
	1.8 m	70 mm ²	037243
	5 m	70 mm ²	047617
	10 m	70 mm ²	047624
	10 m	95 mm ²	047631
	15 m	95 mm ²	038448
	20 m	95 mm ²	038455



 MADE IN FRANCE	EN60974-1 (40°C)						Equipement d'origine - Original equipment Originalausstattung Equipamiento de fabrica					
	IA (60%)	X% (I2 max)	Electronic Control	m/min	200 mm 5 kg	300 mm 15 kg	GAS	NO GAS		TYPE	cm	kg
	500	60		22	■	■	0.6 + 1.6	0.9 + 2.4	1.0 / 1.2 mm	C-042117	70 × 51 × 38	20.5

MIG

✓ EXAGON 400 CC/CV
✓ EXAGON 400 FLEX CC/CV

PORTABLE
FEEDER

UNIVERSAL
CHANTIER - JOBSITE



NOMADFEED
425-4 CC/CV
036291

I V 						DC power source		Equipement d'origine - Original equipment - Originalausstattung - Equipamiento de fabrica							IP		
	50/60 Hz	100% A	60% A	Ø mm	Electronic Control	GAS	NO GAS	Mode Constant Current	Mode Constant Voltage	 mm	TYPE						
	16>110V DC	300	425	200/300		0.6+1.6	0.9÷2.4	■	■	1.2/1.6	 E-038615  C-038646	4 m	95 mm ²	■	67.5 × 27 × 49	15.5	23

TIG HF


✓ EXAGON 400 CC/CV
✗ EXAGON 400 FLEX CC/CV

HF IGNITION
CONTROL UNIT

✓ 2T ✓ 4T

✓ HF 9kV

UNIVERSAL




EXATIG
no accessories:
013780



FULL CONTROL
SPECIAL EXAGON 400 CC/CV



OPTIONS



EXATIG / EXAGON connection





ACCESSORIES

TORCHES & CONSUMABLES

TORCHES MANUELLES - Manual Torches - Brenner - Antorcha - Lastoort - Tocha

Classic

Classic

Grip

Abimig

Fume Extraction

Torches aspirantes - Fume Extraction Torches - Rauchgas-Absaugbrenner - Antorcha con aspiración de humos

24V PUSH PULL & SPOOL GUN TORCHES (IDEAL ALU)

PUSH PULL for NEOPULSE 220C & 220C XL

Light weight

MADE IN FRANCE

GALETS - Rollers - Drahtführungsrollen - Rollen - Rodillos - Wielen - Roletes

0.6/0.8/1.0 046290
0.8/1.0/1.2 038752

Connector Push Pull 10 pts 064393

PUSH PULL PLUS for EXAFEED, NEOFEED & NEOPULSE 320C

Included

Push Pull (24V/42V) Connector 14pt, male 047686

PUSH PULL INLINE for EXAFEED, NEOFEED & NEOPULSE 320C

GALETS - Rollers - Drahtführungsrollen - Rollen - Rodillos - Wielen - Roletes

1.0/1.0 038189
1.2/1.2 (Included) 038196

CONSOMMABLES - Consumables

Gaines - Torch liners - Mantel - Funda - Drahtseelen - Folha

Supports tube contact & diffuseurs - Tip adaptors & diffusers

A1		A2	
B1		B2	
C1		C2	
D1		D2	
E1		E2	
F			

Tubes contacts - Contact tips - Kontaktröhre - Tubo de contacto - Contactbuis - Pontas de contacto

A	
B	
C	
D	
E	

Buses - Gas nozzles - Düsen - Tubo - Nippel - Bicos

A	
B	
C	
D	
E	

SUPPORTS TORCHE - Torch stands - Brennerhalter

COBOT
067752

Magnetic
041653

Torches complètes - Complete Torches - Brenner - Antorcha - Lastoort - Tocha

 X% 40°C, Ar/Co ₂	ACIER / INOX - STEEL / STAINLESS STEEL - STAHL / EDELSTAHL								ALU - ALUMINIUM - ALUMINIO						PUSH PULL		PUSH PULL PLUS			PUSH PULL INLINE	
	AIR						LIQUID		AIR				LIQUID		AIR		LIQUID	AIR	LIQUID	AIR	LIQUID
	150A	150A	250A	250A	350A	450A	300A	500A	150A	230A	200A	290A	270A	450A	160A	220A	240A	270A	350A	270A	350A
	60%	60%	60%	60%	60%	60%	100%	100%	60%	60%	60%	60%	100%	100%	40%	20%	100%	60%	100%	60%	100%
 M6 Ø0.8	A1+A2	A1+A2	B1+B2	B1+B2	D1+D2	F	C1+C2	E1+E2	A1+A2	A1+A2	B1+B2	D1+D2	C1+C2	E1+E2	A1+A2	B1+B2	C1+C2	D1+D2	E1+E2	D1+D2	E1+E2
 M6 Ø1.0	M6 Ø0.8	M6 Ø1.0	M6 Ø0.8	M6 Ø1.0	M8 Ø1.2	M8 Ø1.2	M6 Ø1.2	M8 Ø1.2	M6 Ø0.8	M6 Ø1.2	M6 Ø1.0	M8 Ø1.2	M6 Ø1.2	M8 Ø1.2	M6 Ø1.0	M6 Ø1.2	M6 Ø1.2	M8 Ø1.2	M8 Ø1.2	M8 Ø1.2	M8 Ø1.2
	3 m 063754	3 m 072121	3 m 072145	3 m 072152	4 m 063792	4 m 045392	3 m 040694	4 m 041004	3 m 063761	3 m 072138	3 m 063785	3 m 063808	3 m 040748	3 m CARBON 046160	4 m 044111	4 m 046283	8 m 038141	8 m 038738	8 m 038745	7.6 m 072992	7.6 m 073005
	3 m 041424			4 m 063778	3 m 040687		4 m 043275	5 m 038714	3 m 041462		3 m 040724	3 m CARBON 040731	4 m 043282	4 m CARBON 041097							
	3 m 043268			3 m 040700	4 m 040946			4 m 040564			4 m 040939	4 m CARBON 040953									
	3 m 043251			4 m 040922	4 m 040557																
				3 m 040540																	

Supports tube contact & diffuseurs - Tip adaptors & diffusers

	ACIER / INOX - STEEL / STAINLESS STEEL - STAHL / EDELSTAHL								ALU - ALUMINIUM - ALUMINIO						PUSH PULL		PUSH PULL PLUS			PUSH PULL INLINE	
	AIR						LIQUID		AIR				LIQUID		AIR		LIQUID	AIR	LIQUID	AIR	LIQUID
	150A	150A	250A	250A	350A	450A	300A	500A	150A	150A	250A	350A	300A	500A	150A	250A	250A	350A	500A	350A	500A
	A1 (x5) 042902	A1 (x5) 042902	B1 (x5) 042995	B1 (x5) 042995	D1 (x3) 043008	F (x3) 045484	C1 (x3) 043589	E1 (x5) 042940	A1 (x5) 042902	A1 (x5) 042902	B1 (x5) 042995	D1 (x3) 043008	C1 (x3) 043589	E1 (x5) 042940	A1 (x5) 042902	B1 (x5) 042995	C1 (x3) 043589	D1 (x3) 043008	E1 (x5) 042940	D1 (x3) 043008	E1 (x5) 042940
	A2 (x10) 042988	A2 (x10) 042988	B2 (x5) 042919	B2 (x5) 042919	D2 (x5) 042926		C2 (x5) 043541	E2 (x3) 043022	A2 (x10) 042988	A2 (x10) 042988	B2 (x5) 042919	D2 (x5) 042926	C2 (x5) 043541	E2 (x3) 043022	A2 (x10) 042988	B2 (x5) 042919	C2 (x5) 043541	D2 (x5) 042926	E2 (x3) 043022	D2 (x5) 042926	E2 (x3) 043022

Tubes contacts - Contact tips - Kontaktröhre - Tubo de contacto - Contactbuis - Pontas de contacto

	150A	150A	250A	250A	350A	450A	300A	500A	150A	150A	250A	350A	300A	500A	150A	250A	250A	350A	500A	350A	500A
Ø0.6	A (x10) 041905	A (x10) 041905	A (x10) 041905	A (x10) 041905	—	—	A (x10) 041905	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Ø0.8	A (x10) 041912	A (x10) 041912	B (x10) 041950	B (x10) 041950	C (x10) 041790	C (x10) 041790	B (x10) 041950	C (x10) 041790	A (x10) 041059	A (x10) 041059	A (x10) 041059	—	A (x10) 041059	—	A (x10) 041059	A (x10) 041059	A (x10) 041059	C (x10) 041059	C (x10) 041059	C (x10) 041059	C (x10) 041059
Ø1.0	A (x10) 041929	A (x10) 041929	B (x10) 041967	B (x10) 041967	C (x10) 0419803	C (x10) 0419803	B (x10) 041967	C (x10) 0419803	B (x10) 041066	B (x10) 041066	B (x10) 041066	C (x10) 0419766	B (x10) 041066	C (x10) 0419766	B (x10) 041066	B (x10) 041066	B (x10) 041066	C (x10) 0419766	C (x10) 0419766	C (x10) 0419766	C (x10) 0419766
Ø1.2	A (x10) 040144	A (x10) 040144	B (x10) 041974	B (x10) 041974	C (x10) 0419810	C (x10) 0419810	B (x10) 041974	C (x10) 0419810	B (x10) 041073	B (x10) 041073	B (x10) 041073	C (x10) 0419773	B (x10) 041073	C (x10) 0419773	B (x10) 041073	B (x10) 041073	B (x10) 041073	C (x10) 0419773	C (x10) 0419773	C (x10) 0419773	C (x10) 0419773
Ø1.4	—	—	—	—	C (x10) 0419827	C (x10) 0419827	—	C (x10) 0419827	—	—	—	—	—	—	—	—	—	—	—	—	—
Ø1.6	—	—	—	—	C (x10) 0419834	C (x10) 0419834	—	C (x10) 0419834	—	—	—	C (x10) 041080	—	C (x10) 041080	—	—	—	C (x10) 041080	C (x10) 041080	C (x10) 041080	C (x10) 041080
Ø2.4	—	—	—	—	C (x10) 040533	C (x10) 040533	—	C (x10) 040533	—	—	—	—	—	—	—	—	—	—	—	—	—

Buses - Gas nozzles - Düsen - Tubo - Nippel - Bicos

	150A	150A	250A	250A	350A	450A	300A	500A	150A	150A	250A	350A	300A	500A	150A	250A	250A	350A	500A	500A	500A
	Ø12	Ø12	Ø15	Ø15	Ø16	Ø19	Ø12	Ø16	—	—	Ø15	Ø16	Ø12	Ø16	Ø12	Ø15	Ø15	Ø16	Ø16	Ø16	Ø16
Conique Conical nozzle Kónische Düse	A (x3) 041875	A (x3) 041875	A (x3) 041882	A (x3) 041882	A (x3) 041783	A (x3) 045491	A (x3) 043534	A (x3) 042315	A (x3) 041875	A (x3) 041875	A (x3) 041882	A (x3) 041783	A (x3) 043534	A (x3) 042315	A (x3) 041875	A (x3) 041882	A (x3) 041882	A (x3) 041783	A (x3) 042315	A (x3) 042315	A (x3) 042315
Pointage Spot welding Punktölse	B (x1) 041851	B (x1) 041851																			
Soude clou Nail welding Nagelschweißdüse	C (x1) 041523	C (x1) 041523																			
Special No Gas (isolated)	D (x1) 041868	D (x1) 041868																			

Coffrets - Boxes - Verschleißteilebox - Cajas - Kistjes - Estojes

MB 15 (150 A) 041226	MB 15 / MB 25 (250 A) 037458	MB 25 (250 A) 041233	MB 36 (350 A) 041417	MB 501 (500 A) 072381
x3	x5 (M6-Ø0.8) x5 (M6-Ø1.0) x5 (Alu-M6-Ø0.8)	x5	x2	x2
x5 (M6-Ø0.6) x5 (M6-Ø0.8) x5 (Alu-M6-Ø0.8)		x5 (M6-Ø0.8) x5 (M6-Ø1.0) x5 (Alu-M6-Ø1.0)	x5 (M6-Ø1.0) x5 (M6-Ø1.2) x5 (Alu-M6-Ø1.0) x5 (Alu-M6-Ø1.2)	x5 (M6-Ø1.0) x5 (M6-Ø1.2) x5 (Alu-M6-Ø1.0) x5 (Alu-M6-Ø1.2)
x3		x3	x2	x2

Gaines - Torch liners - Mantel - Funda - Drahtseelen - Folha

ACIER - STEEL - STAHL - ACERO - STAAL - AÇO	TEFLON	CARBON	PUSH PULL TORCH	PUSH PULL PLUS
Ø0.6 3 m 041592	Ø0.6x0.8 3 m 041578	Ø0.6x0.8 4 m 039834	Ø1.0 8 m 038172	Ø0.8x1.0 145 mm 038158
Ø0.8 4 m 041837	Ø0.8x1.2 4 m 044050	Ø0.8x1.2 5 m 062306		Ø1.2x1.6 145 mm 038165
Ø1.0 3 m 041608	Ø1.0x1.2 3 m 041585	Ø1.0x1.2 4 m 039827		
Ø1.0 4 m 041844	Ø1.0x1.2 4 m 044067	Ø1.0x1.2 5 m 062313		
Ø1.2 5 m 062276	Ø1.2x1.6 8 m 038677	Ø1.2x1.6 4 m 039810		
Ø1.2 3 m 041847				
Ø1.2 4 m 041842				
Ø1.2 5 m 062283				
Ø1.2 5 m 038684				
Ø1.6 4 m 040526				
Ø1.6 5 m 062290				

BOBINES DE FIL - Welding wire reels - Massivdrahtspulen - Rollos de hilo- Draadbobijn - Bobines de fio

				bobine écologique / ecological wire reel				 100mm								
for	kg			Ø 0.6 mm	Ø 0.8 mm	Ø 0.9 mm	Ø 1.0 mm	Ø 1.2 mm	EXCELLIUM			NORMES - Norms - Normen - Norma				
									Ø 0.8 mm	Ø 1.0 mm	Ø 1.2 mm	AWS	EN	DIN		
Acier - Steel - Stahl - Acero - Staal - Aço	SG2	0.9	100 mm	—	086593	086609							5.18: ER 70S-6	ISO 14341-A: G46 4MG351	8559: SG2	
		5	200 mm	—	086111	086128		086135								
		15	300 mm	—	086166	086227		086234	086241		086302	086319				
		18	—	300 mm		086272		086289	086296							
	SG1	5	200 mm	—	086418	086401							5.18: ER 70S-3	ISO 14341-A: G42 2MG251	8559: SG1	
	CrM02Si	15	300 mm	—		086258							5.28: ER 90S-B3	ISO 2195L-A: Cr CrMo2Si	—	
	UHSS	5	200 mm	—		086203							ASME SFA-5.28: ER 120 S-G	ISO 12534: G Mn4Ni2, 5CrMo	—	
	Fil fourré, Cored wire, Fülldraht, Hilo tubular NO GAS	0.9	100 mm	—	086425		086104						5.20: E71T-G5	ISO 17632-A T42 ZW N 1 H15	—	
		4.5	200 mm	—			086265	086623	086630							
		15	300 mm	—				086388	086395							
	Rechargement Acier 60 HRC - Hardfacing	16	—	300 mm					086173				—	14700: TZ Fe 2	8555: MSG 6-CF-60	
	Galva (G2Ti)	5	200 mm	—	086760	086777							5.18: ER 70S-2	ISO 14341-A: G42 2 M G2Ti	8559: SG2	
	CuSi3 HLE - UHTS (Boron Steel)	1	100 mm	—		086692							5.7: ER CuSi-A	ISO 14640: S Cu 6560	1733: SG-CuSi3	
		5	200 mm	—		086647		086654		086210						
		5	200 mm	—		086661		086197					5.7: ER CuAl-A1	ISO 14640: S Cu 6100	1733: SG-CuAl8	
	CuAl8 HLE - UHTS (Boron Steel)	15	300 mm	—				086180								
Inox - Stainless steel - Edelstahl	CrNi (308LSi)	1	100 mm	—		086616						5.9: ER 308L Si	ISO 14343-A: G19 9 L Si	8556: SG X2CrNi 19 9		
		5	200 mm	—		086579		086340								
		15	300 mm					086357								
	CrNi (316LSi)	5	200 mm	—		086326		086364				5.9: ER 316L Si	ISO 14343-A: G19 12 3 L Si	8556: SG X2 CrNiMo 19 12		
		15	300 mm	—				086371								
Aluminium	AlMg2.7Mn	2	200 mm	—				086517				5.10: ER 5554	ISO 18273: S Al 5554	1732: SG-AlMg		
		7	300 mm	—					086500							
	AlMg5	0.5	100 mm	—		086548										
		2	200 mm	—		086555		086562				5.10: ER 5356	ISO 18273: S Al 5356	1732: SG-AlMg5		
		7	300 mm	—				086524	086531							
		7	—	300 mm							086487	086494				
	AlSi5	0.5	100 mm	—		086685						5.10: ER 4043	ISO 18273: S Al 4043-A	1732: SG-AlSi5		
		2	200 mm	—				086142	086159							
	AlSi12	0.5	100 mm	—		086678						5.10: ER 4047	ISO 18273: S Al 4047	1732: SG-AlSi12		
		2	200 mm	—		077140		086067	086074							
		7	300 mm	—					086043							
	AlSi10Cu4	2	200 mm	—					073432			5.10: ER 4145	ISO 18273: S Al 41	—		

ADAPTATEURS BOBINES - Adaptors for wire reels - Korbspulenadapter



ALIGNER 200
Ø 200
042889



ECO ADAPTER 300
Intensive pour bobine écologique - for ecological wire reel - für Eco Fülldrahtrolle
043305



Ø 200 & 300
Professional
71608





Ø 200 & 300
Industrial
71613

Press & Lock




Guide fil - Guide Tube Kit
Ø 0.6 > 1.6 061965
Ø 1.8 > 2.8 061972

GALETS - Rollers - Drahtführungsrollen - Rollen - Rodillos - Wielen - Roletes

		TYPE A		TYPE B		TYPE C		TYPE D		TYPE E		TYPE F	
													
		Smartmig 142/152/162/182/183, Monogys 200-4, EasyMIG 150/160/160XL/180-4XL, Multipearl 210-2, Multiweld 160/200/220/250		Monogys 250-4/320-4, Trimig, Promig, TF-4R/4W, WWSS-4L, Multipearl 210-4 XL/211-4, Multiweld 320, Neopulse 220, Kronos, WF 35		Magys 400-4, WS-4L/4R, Nomadfeed (down), Exafeed, Neopulse 300		Smartmig 110, EasyMIG 85/110/130/140		Nomadfeed (UP)		Neofeed, Neopulse 320C/400CW, Smartfeed, WF 50	
Acier - Steel Stahl- Acero Staal - Aço Inox - Stainless	Ø 0.6 / 0.8	x1	042339	x1	042087	x2	042353	x2	041738	x1	039483		
	Ø 0.8 / 1.0	x1	041189	x1	042100	x2	042360	x2	042094				
	Ø 1.0 / 1.2	x1	062221	x1	042179	x2	046849	x2	042117				
	Ø 1.2 / 1.4							x2	039780				
Alu	Ø 1.2 / 1.6							x2	041752				
	Ø 0.8 / 1.0	x1	041196	x1	042155	x2	042377	x2	042148	x1	039469	x2	Ø 1.0 038578
	Ø 1.0 / 1.2	x1	062214	x1	042186	x2	040915	x2	042162			x2	Ø 1.2 038585
	Ø 1.2 / 1.6					x2	042391	x2	041776			x2	Ø 1.6 038592
Fil fourré - Cored wire	Ø 0.6 / 0.9	x1	068933	x1	068940			x1	068926				
	Ø 0.8 (solid) / 0.9 (cored)	x1	046856					x1	039476				
	Ø 0.9 / 1.0							x1	044081				
	Ø 0.9 / 1.2	x1	042346	x1	042131	x2	042407					x2	Ø 1.2 038608
	Ø 1.2 / 1.4											x4	047693
	Ø 1.2 / 1.6											x2	038646
	Ø 1.6 / 2.0											x2	037113
	Ø 1.6 / 2.4											x4	040519
	Ø 1.8 / 2.0											x2	061743

PINCE SPÉCIALE MIG/MAG - ORIGINAL FIX
- Special MIG/MAG plier - Spezial MIG/MAG Zange
- Pinza especial MIG/MAG

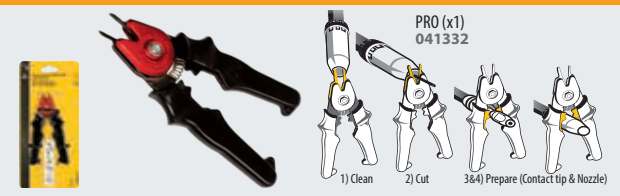

Support torche magnétique
- MIG torch stand with magnetic base - MIG-Brennerhalter mit Magnetfuß




041653

Liquide anti-grattons
- Anti spatter fluid - Antihafmittel



10L
054134

Pâte anti-adhérente
- Anti spatter paste - Antihaf-Paste




300 g
054110

Pulvérisateur métallique
- Metallic spray bottle - Metallische Sprühflasche



054127

Spray protection céramique
- Ceramic protective spray - Keramisches Schutzspray



054141

Spray protecteur (sans silicone)
- Anti-spatter spray (without silicone)



041806

KITS SOUDAGE NO GAS
- No Gas Welding Kits

041240

150 A type A

Isolated Nozzle (x1)
M6 - Ø 0.9/1.0 (x3)
Type A
Ø 0.9-1.0 / 1.2 (x1)

072329

250 A

Base (x1)
Ceramic nozzle (x3)
M6 - Ø 0.9/1.0 (x3)
Type A
Ø 0.9-1.0 / 1.2 (x1)

072336

250 A type A

Base (x1)
Ceramic nozzle (x3)
M6 - Ø 0.9/1.0 (x3)
Type A
Ø 0.9-1.0 / 1.2 (x1)

072343

250 A type B

Base (x1)
Ceramic nozzle (x3)
M6 - Ø 0.9/1.0 (x3)
Type B
Ø 0.9-1.0 / 1.2 (x2)

SUPPORT ÉLINGAGE DÉVIDOIR
- Wire feeder support - Drahtvorschubhalterung

036277

Max 50 kg
EN 60974-1

TF-4RN/W ✓
WS-4R/4L ✓
WF 35/50 ✓
NEOFEED ✓
EXAFEED ✓

MADE IN FRANCE

SUPPORTS TORCHE MIG - MIG torch supports - MIG-Brennerteleskophalterung

MIG Lift Compact
046597

adjustable max 1.3 m

adjustable

OPTION adapter for Neopulse 400 CW 072237

180°

MIG Lift Pro
046429

adjustable max 2.5 m

adjustable

OPTION Universal wire feeder support 046436

360°

 MADE IN FRANCE	L	rotation	Torches compatibility		Machines compatibility										Wire feeder compatibility							
			classic	fume extraction	MONOGYS / TRIMIG		PROMIG		MAGYS		EXAGON	NEOPULSE		NEOMIG-i	WS-4R/L	Neofeed/EXAFEED	TF4RN/W	WF 35 & 50				
MIG LIFT COMPACT	adjustable 1.3 m max	180°	✓	—	320-4CS	200-4S	250-4S.DV	300-4S	400-4S	400 G.DV	400-4S DUO.DV	400-4	500 WS	400 CC/CV	400 CW	400G	500G	400 G & 500 G	—	—	—	—
			—	—	—	—	—	—	—	—	—	—	—	with adapter 072237	—	—	—	—	—	—	—	
MIG LIFT PRO	adjustable 2.5 m max	360°	✓	✓	—	—	—	—	—	—	—	—	—	sur chariot - on trolley	—	sur chariot	with trolley	with trolley	—	—	—	—
			—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	